

TA45S

Insulated Aerial Device

Working Height of 16 m
Side Reach of 9.3 m
Platform Capacity of 272 kg



1300 1ALTEC
www.altecaus.com.au

 **Altec**®

STANDARD FEATURES

- Altec ISO-Grip® System – Single Hand Control
- Lifetime structural warranty
- Insulation per AS1418.10 - 2011, 66kv/66kv Dry & 66kv/33kv Wet
- Continuous Rotation
- Designed in ISO 9001 Certified Facilities
- 180 Degree Platform Rotator
- 2 Man Platform
- Platform Capacity – 272 kg's
- Platform Access from the Ground
- Telescopic/Articulated Aerial Device
- Tool Circuit at Platform
- Straight Down Outriggers
- Secondary Stowage System
- Powder-coated steel structures
- Designed in ISO 9001 Certified Facilities
- Centrifugally Cast Fiberglass Upper Boom
- Pressure, Closed Centre Hydraulic System


OPTIONS

- Custom Layout, Lockers and Accessories as required
- Chassis Spring Interlocks for use without Outriggers
- Comprehensive Range of Tools and Equipment from Altec Supply®

GENERAL SPECIFICATIONS

Ground to Bottom of Platform*	14.5 m
Working Height	16 m
Maximum Reach	9.3 m
Boom Articulations	
Articulating Arm	-5° to +91°
Upper Boom	-38° to +75°
*Varies Depending on Chassis Frame Height	

REACH DIAGRAM

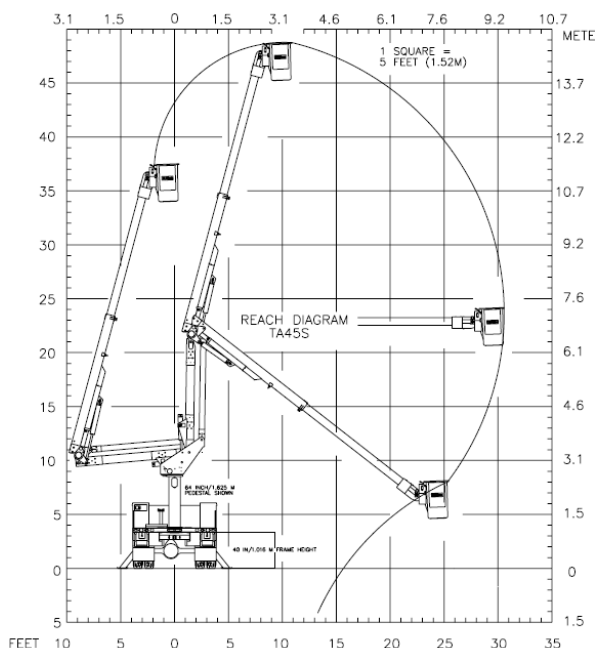

180 degree platform rotator



Iso-Grip Control



For more complete information on Altec products and services, visit us on www.altecaus.com. Material and specifications are subject to change without notice. Featured units in photos may include optional features. Please contact an Altec representative for all available options. Altec® and the Altec logo are registered trademarks of Altec Inc. in the United States and various other countries and may not be used without permission.

© 2015 Altec Inc. All Rights Reserved. AAH.BR.AL16.8

