

NL120KDT

Elevating Work Platform



www.nifty-lift.com.au

P: +61 3 9725 0077 | sales@nifty-lift.com.au

NIFTY-LIFT

an  Altec company

NL120KDT

Elevating Work Platform



Working Height
13m



Ground-Basket
11m



Rated Capacity
180kg



Working Reach
9.3m



To Basket Edge
8.6m




Telescopic Extension
4.2m



Continuous Slew
360°

Features & Benefits:

- Double telescopic upper boom provides a class leading flight envelope- work close to your truck, or up to 9 metres away.
- High basket capacity ensures all operators can work safely at height with their tools and equipment.
- Vertical stabilisers and zero boom tail swing makes working in traffic and tight areas effortless.
- Operator safety is ensured with low voltage and high voltage insulation options to 66kV/33kV/LV.
- Ground access for easy basket loading and rescue.
- Large joystick controls with fully proportional speed control and dual deadman.
- Low profile basket frame ensure wires and branches do not catch during tight works.
- The compact boom design and optional mounting heights makes the NL120KDT ideal for restricted access work in urban areas.

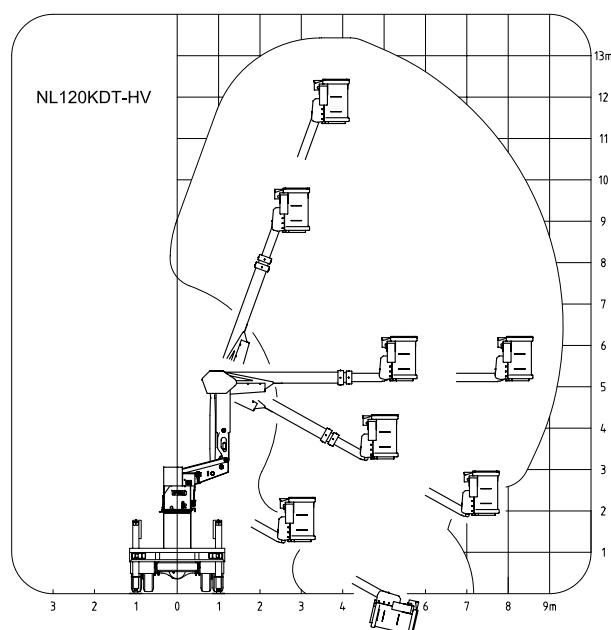

The NL120KDT – The Smart Choice

When speed and onsite functionality is required, the NL120KDT does it better than the rest. The superior 180kg basket capacity can accommodate all operators and their tools, and the double telescopic upper boom results in a shorter truck for ease of maneuverability, all without sacrificing reach. Vertical stabilisers keep the set up compact, and the optional spring lockouts stabilisation system for use without stabilisers maximises productivity for high volume works. Add the NL120KDT to your fleet for a boost to your bottom line.

Optional Accessories

- Dash mounted Enhanced User Interface for operational assistance, fault overrides and data logging
- Higher productivity is achievable with optional spring lockouts for operation without deploying stabilisers.
- Extensive range of bodywork options including toolboxes, cable drum reels, signage racks, cone holders, vices, lighting and towbar kits.

NL120KDT

Advanced Features

180kg rated capacity basket with 900mm and 1200mm wide baskets available

Patented IICL high voltage boom eliminates internal cleaning

Double telescopic upper boom

Proven design and quality construction will ensure a lifetime of reliable operation


Hand pumps for emergency operation of work platform and stabilisers

High volume open circuit hydraulic system for quick, multi-function operation

Suitable for multiple brands of cab chassis - 4x2, 4x4

Customised bodywork design available

Ground access and full basket tilt for operator rescue

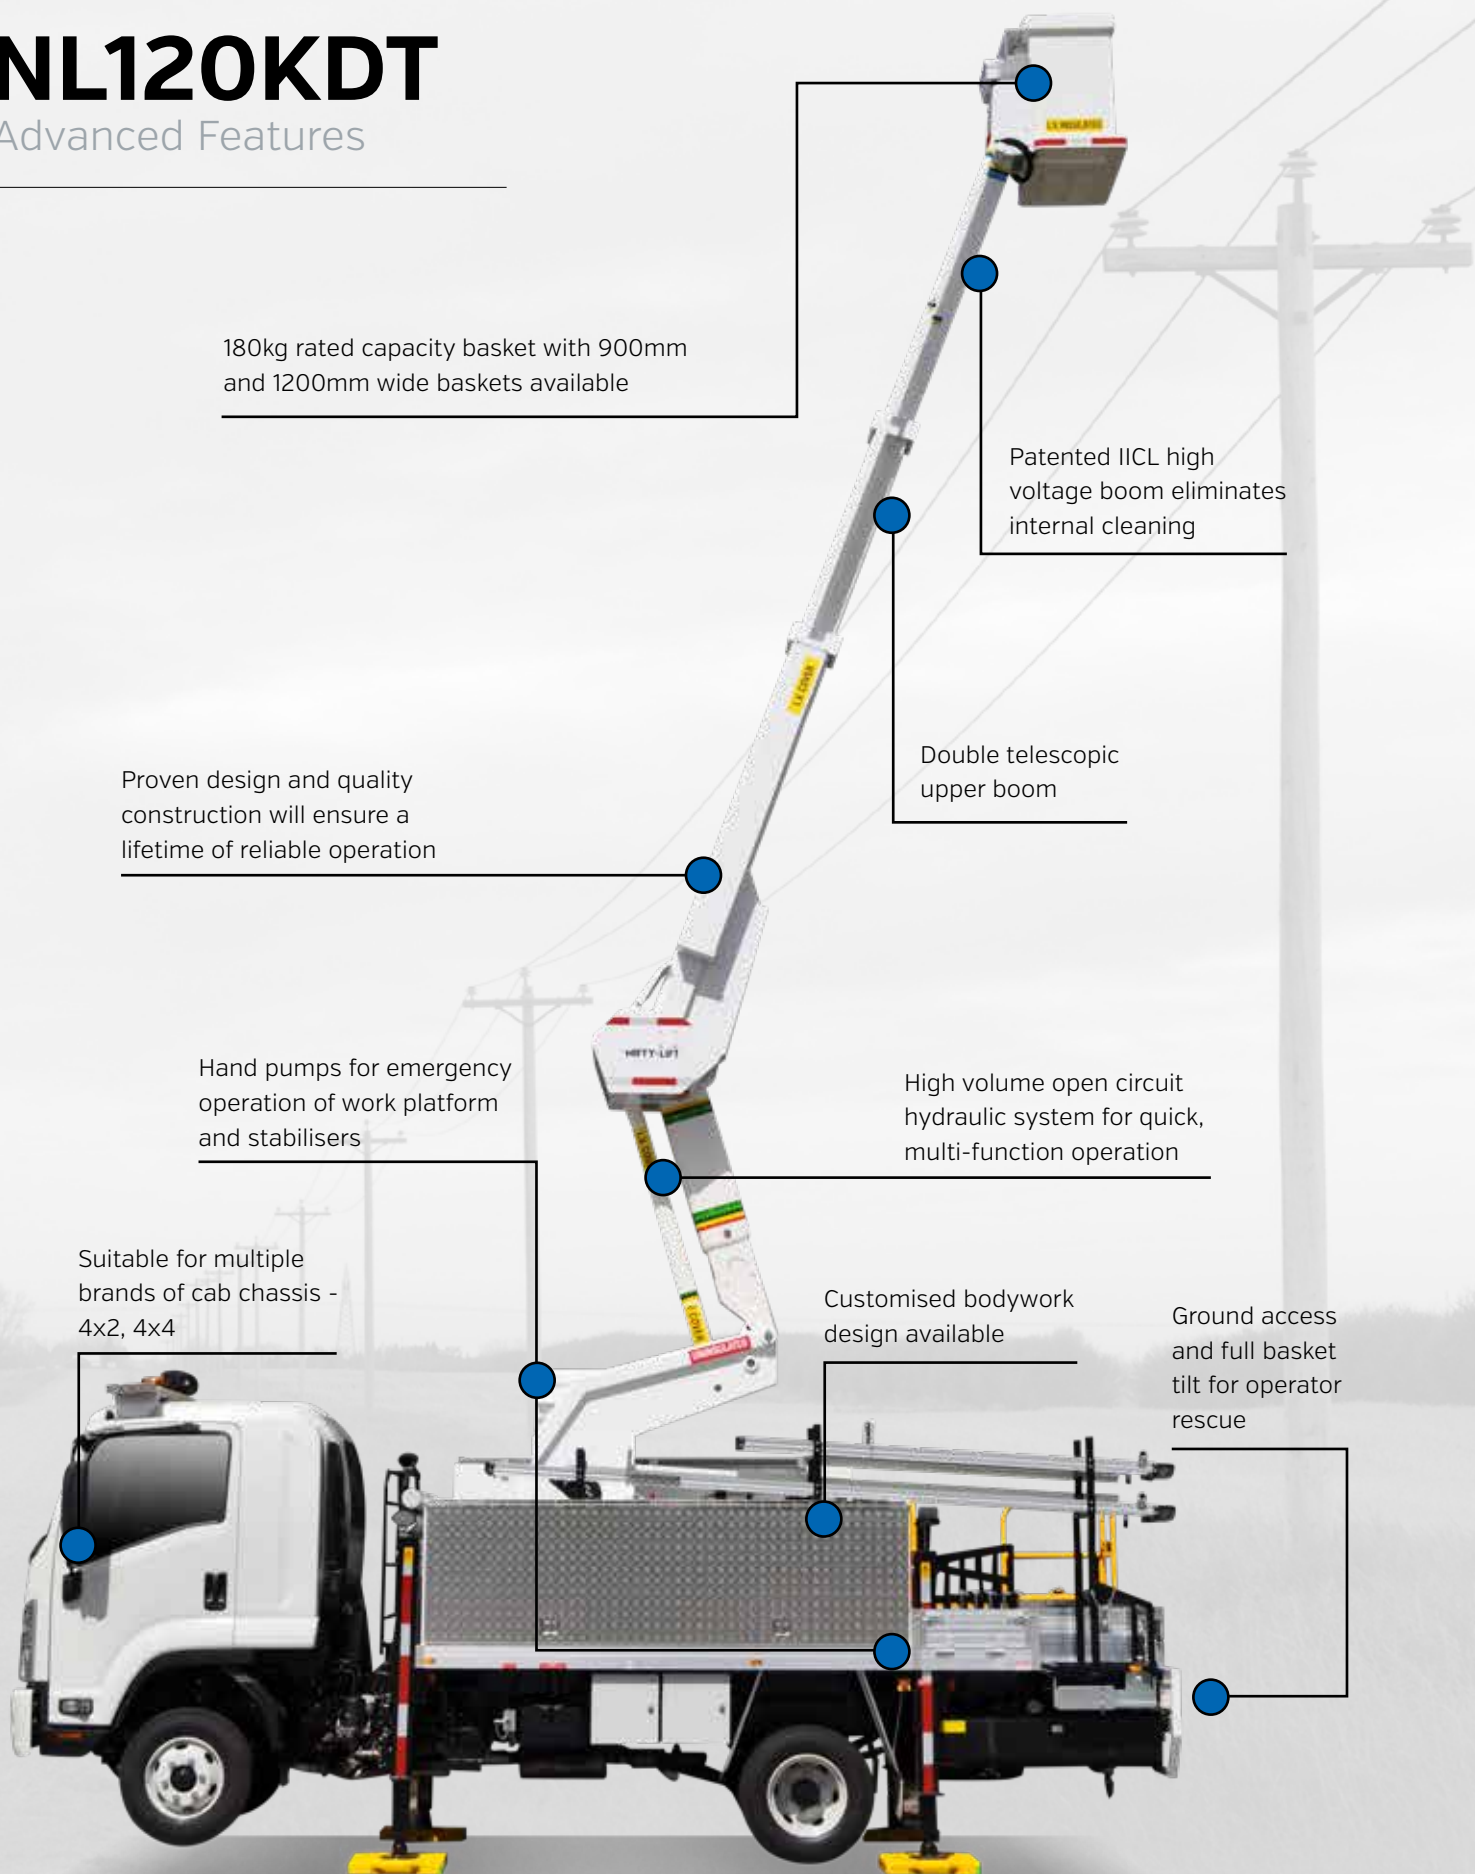

Why Choose Nifty-Lift?

Designed & Engineered In Australia

Our optimised designs ensure greater job site performance coupled with less downtime, giving you higher productivity and lower cost of ownership over the life of the work platform. Nifty-Lift has over 25 years of experience designing innovative access solutions, and through extensive industry consultation and the use of cutting edge engineering software we have produced a range of industry leading models. Our experience and expertise gives owners and operators piece of mind when working at height in a Nifty-Lift elevating work platform.

After Sales Support

We support our work platforms through their entire lifecycle, not just under warranty. The team of highly experienced Nifty-Lift service technicians are available to assist operators, fleet owners and workshops with training, advice, documentation and product upgrades. We partner with our customers for life.

Parts Department

Nifty-Lift stocks thousands of genuine spare parts. We can easily arrange overnight freight for all your spares and service items to ensure your EWP is returned to service with minimal downtime.

Nifty-Lift reserves the right to alter specifications without notice. Photographs and drawings in this document are for illustrative purposes only. Product shown in photos contains optional features. Nifty-Lift, in so far as it is permitted by law to do so, shall not be liable in any way as a result of any reliance by any person on anything contained in this brochure. Please contact Nifty-Lift for current and detailed specifications.