


LT SERIES

Hi-Ranger Telescopic Aerial Device

AERIAL DEVICES

Terex® Hi-Ranger Aerial Devices are known throughout the industry. They come with a long history featuring quality and innovative design.

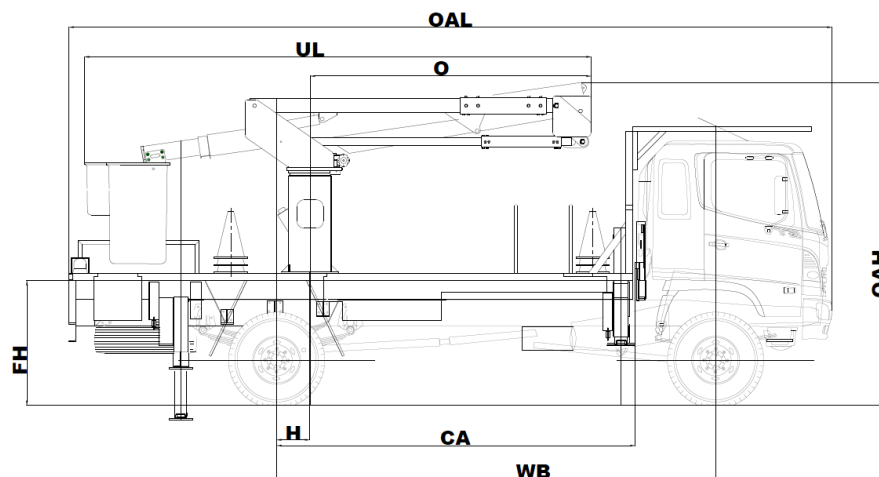

MEASUREMENTS	LT40
Typical Frame Height (FH)	1200mm
Typical Cab Height (CH)	2460mm
Offset (O)	3050mm
Overall Height (OAH)	3500mm
Overall Length (OAL)	6340mm
Unit Length (UL)	5540mm
Center of Rotation (H)	350mm
Cab to Axle (CA)	3580mm
Wheel Base (WB)	4250mm
Minimum Chassis Requirement (subject to final configuration)	11,000 kg


TEREX®

500 Oakwood Road
PO BOX 1150
Watertown, SD 57201-6150
USA

Phone: (605) 882-4000
Fax: (605) 882-1842
www.terexutilities.com
Email: utilities.info@terex.com

Distributed By:




13 Wheeler Crescent
Currumbin Qld 4223
07 55984322
info@liftindustries.com.au
www.liftindustries.com.au

LT SERIES

Hi-Ranger Telescopic Aerial Device

STANDARD EQUIPMENT

- End Mounted 24 x 30 x 42" One Person Platform
- Platform Capacity 136kg
- 4-Function Single Stick
- Safety Harness With Attached Lanyard
- Continuous Unrestricted Worm Gear Rotation
- Rectangular, Bi-Axial Epoxy Resin, Filament Wound Fiberglass Booms
- Full Pressure Controls on Side of Platform
- Individual Lever Lower Controls
- Platform Tilt Control At Upper and Lower Controls
- Hydraulic Tool Outlets
- Engine Stop / Start
- Hydraulic Platform Leveling
- Steel Main Boom with Fiberglass Insert
- Fiberglass Second Section Boom
- Fiberglass Lift Boom Insert
- Full Pressure, Open-Center Hydraulic System
- 30 Litre Pedetal Mounted External Tank
- Padded Boom Rest
- Hydraulic Platform Rotator
- Truck Level Indicator
- Finish Painted

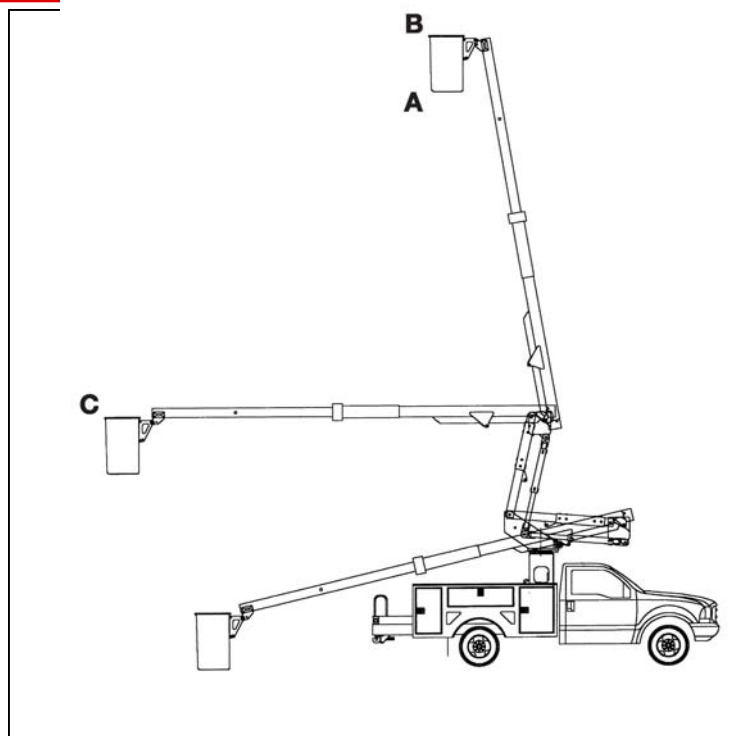

CAPACITIES AND DIMENSIONAL DATA (Based on a 1016mm Frame Height)

	Bottom of Platform Height (A)	Working Height (B)	Horizontal Reach (C)	Boom Travel		Platform Capacity
				Lower Boom	Upper Boom	
LT40 without outriggers	12400mm	13800mm	8500mm	0 to 81°	-14 to 80°	159kg
LT40 with outriggers	12400mm	13800mm	9000mm	0 to 90°	-14 to 80°	181kg

OPTIONAL EQUIPMENT

- Various Platform Covers
- Liners With or Without Steps
- Auxiliary Power
- Auxiliary Let Down System
- 20 Gallon Remote Oil Reservoir
- Boom Overstow Protection
- Boom Stow Interlock
- Outrigger Sag Light
- Various Types of Outriggers
 - Moving Outrigger Alarm
 - Boom Interlock
- Truck Grounding Cable & Clamp
- Hybrid Enable
- HyPower™ Hybrid System by Terex®
- Automatic Boom Latch

Effective Date: September 2018. Product specifications and prices are subject to change without notice or obligation. The photographs and/or drawings in this document are for illustrative purposes only. Refer to the appropriate Operator's Manual for instructions on the proper use of this equipment. Failure to follow the appropriate Operator's Manual when using our equipment or to otherwise act irresponsibly may result in serious injury or death. The only warranty applicable to our equipment is the standard written warranty applicable to the particular product and sale and Terex makes no other warranty, express or implied. Products and services listed may be trademarks, service marks or trade-names of Terex Corporation and/or its subsidiaries in the USA and other countries. All rights are reserved. Terex® is a registered trademark of Terex Corporation in the USA and many other countries. Copyright 2018 Terex Corporation.